


Einböck

When grassland care
is joy!

DATA SHEET GRASSLAND TECHNOLOGY

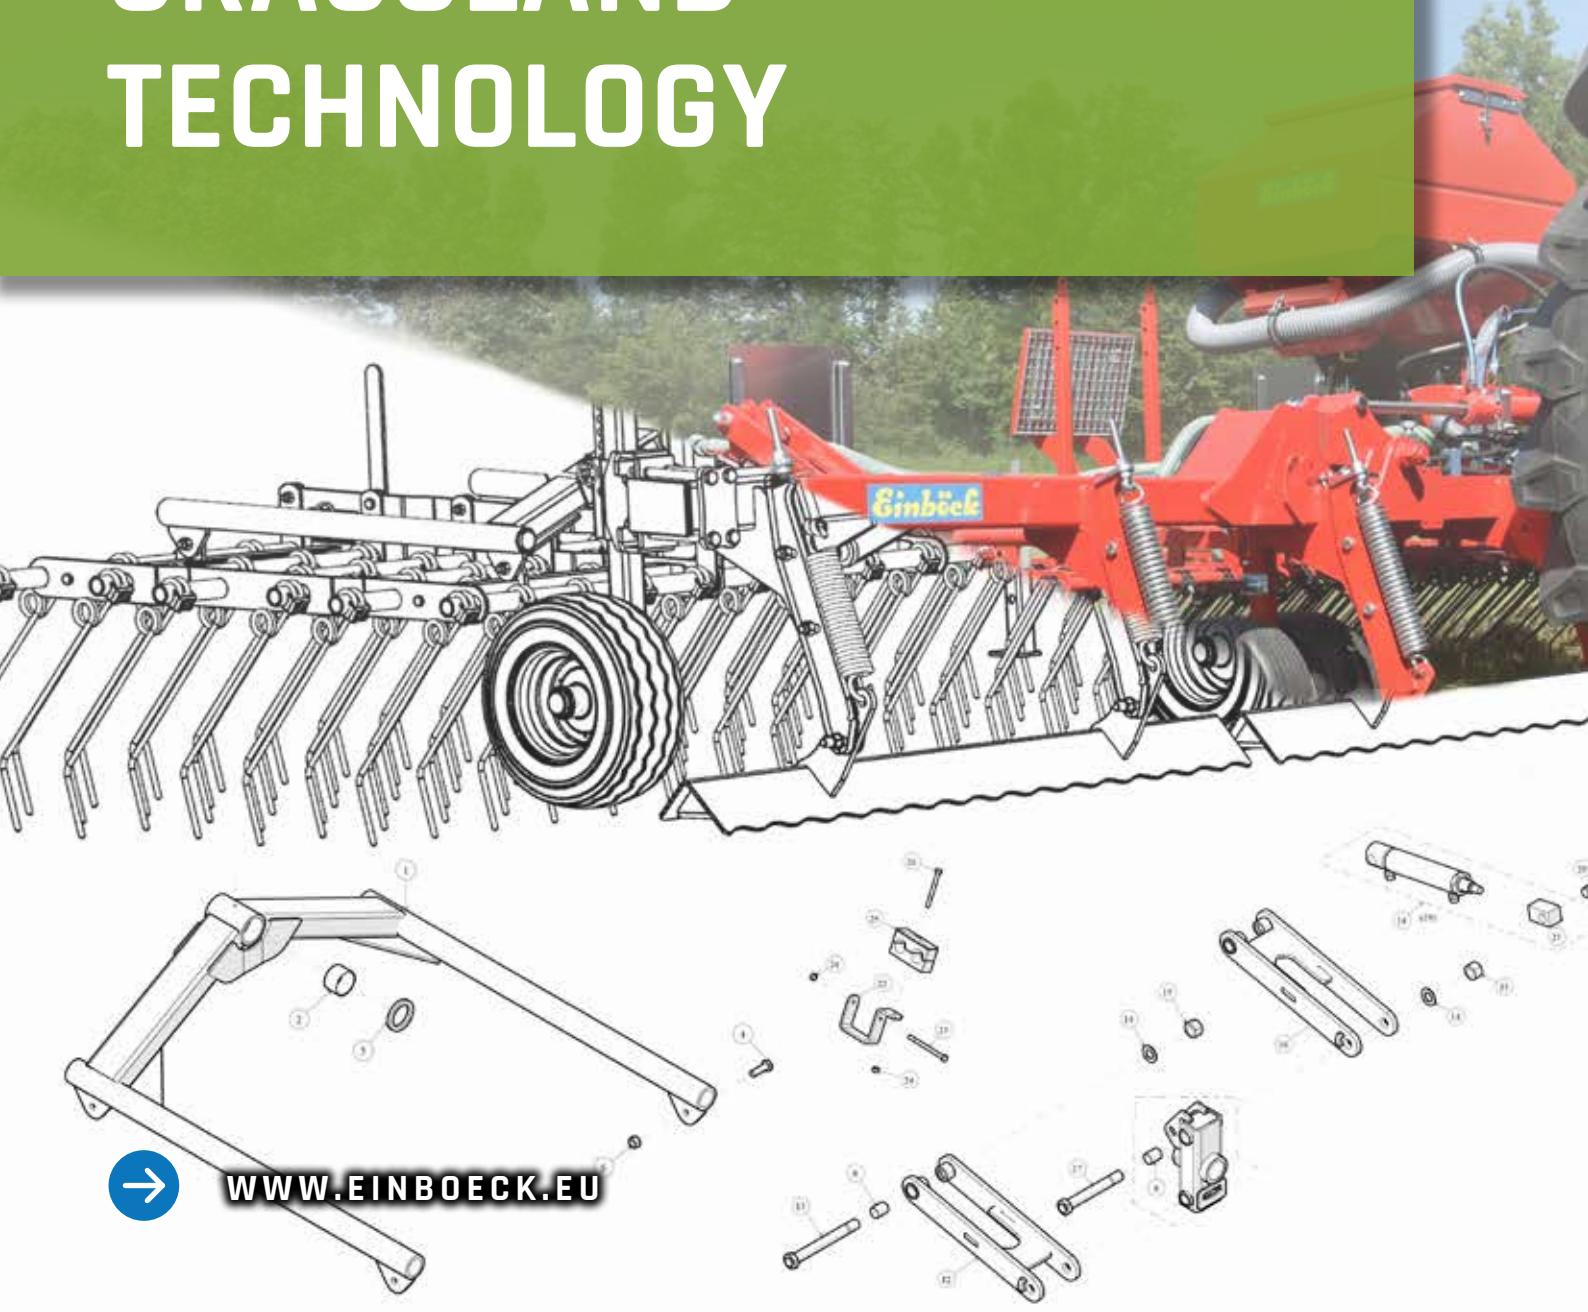

WWW.EINBOECK.EU

GRASSLAND TECHNOLOGY	DIMENSIONS AND TECHNICAL DATA								FOLDING		WHEELS		FRAME DESIGN						
	Model = Working width (cm)	Transport width (cm)	Parking height (cm)	Basic weight (approx. in kg)	Standard track width (approx. in cm), infinitely variable	Track width infinitely variable up to 2,15 m	Mounting category	Power requirement from HP/kW	Rigid	Hydraulically folding	Hydraulic double folding	Semi-mounted / trailed	Hydraulic transport lock	Wheel chocks	Groundwheels (standard equipment)	Heavy frame	Parallel guided weeder sections with hyd./level regulation	Heavy duty front levelling plates	Light front levelling plates
GRASS-MANAGER	150	150	118	190	136-140	●	I/28	20/15	✓	-	-	-	-	-	2	-	-	-	●
	200	200	118	200	136-140	●	I/28	25/18	✓	-	-	-	-	-	2	-	-	-	●
	300	300	118	250	136-140	●	I/28	30/22	✓	-	-	-	-	-	2	-	-	-	●
	450	260	170	520	136-140	●	I/28	40/29	-	✓	-	-	-	-	4	-	-	-	●
	500	260	200	540	136-140	●	I/28	50/37	-	✓	-	-	-	-	4	-	-	-	●
	600	300	240	640	136-140	●	II/28	60/44	-	✓	-	-	-	-	4	●	-	-	●
	750	300	315	850	136-140	●	II/28	70/51	-	✓	-	-	-	-	4	-	-	-	-
	900	300	350	1170	136-140	●	II/28	80/59	-	-	✓	-	●	-	4	●	-	-	●
	1200	300	350	1310	136-140	●	II/28	90/66	-	-	✓	-	●	-	4	●	-	-	●
PNEUMATICSTAR -MD	200	200	190	260	136-140	●	I/28	25/18	✓	-	-	-	-	-	2	-	-	-	●
	300	300	190	350	136-140	●	I/28	30/22	✓	-	-	-	-	-	2	-	-	-	●
	500	300	250	580	136-140	●	I/28	50/37	-	✓	-	-	-	-	4	-	-	-	●
	600	300	250	690	136-140	●	II/28	60/44	-	✓	-	-	-	-	4	●	-	-	●
	900	300	350	1400	136-140	●	II/28	90/66	-	-	✓	-	●	-	4	●	-	-	●
	1200	300	350	1650	136-140	●	II/28	100/74	-	-	✓	-	●	-	4	●	-	-	●
PNEUMATICSTAR -STI	200	200	190	260	136-140	●	I/28	25/18	✓	-	-	-	-	-	2	-	-	-	●
	300	300	190	350	136-140	●	I/28	30/22	✓	-	-	-	-	-	2	-	-	-	●
	500	300	250	580	136-140	●	I/28	50/37	-	✓	-	-	-	-	4	-	-	-	●
	600	300	250	690	136-140	●	II/28	60/44	-	✓	-	-	-	-	4	●	-	-	●
	900	300	350	1400	136-140	●	II/28	90/66	-	-	✓	-	●	-	4	●	-	-	●
	1200	300	350	1650	136-140	●	II/28	100/74	-	-	✓	-	●	-	4	●	-	-	●
GRASS-MANAGER-PRO	300	300	135	670	200	-	II/28	60/44	✓	-	-	-	-	-	4	✓	✓	✓	-
	600	300	300	1280	200	-	II/28	80/59	-	✓	-	-	-	-	6	✓	✓	✓	-
	1200	300	390	4200	220	-	II/28 + III/36	170/125	-	-	-	✓	✓	✓	8	✓	✓	✓	-
PNEUMATICSTAR -PRO-MD	300	300	180	790	200	-	II/28	60/44	✓	-	-	-	-	-	4	✓	✓	✓	-
	600	300	300	1370	200	-	II/28	80/59	-	✓	-	-	-	-	6	✓	✓	✓	-
	1200	300	390	4450	220	-	II/28 + III/36	170/125	-	-	-	✓	✓	✓	8	✓	✓	✓	-
PNEUMATICSTAR -PRO-STI	300	300	180	790	200	-	II/28	60/44	✓	-	-	-	-	-	4	✓	✓	✓	-
	600	300	300	1370	200	-	II/28	80/59	-	✓	-	-	-	-	6	✓	✓	✓	-
	1200	300	390	4450	220	-	II/28 + III/36	170/125	-	-	-	✓	✓	✓	8	✓	✓	✓	-

✓ = standard equipment

● = optionally available

- = not possible

Conversion cm in inch = cm / 2,54

Conversion cm in feet = cm / 30,48

For further options or technical information please contact our sales team. For an up-to-date overview or information, please visit our website and download the latest brochures online (www.einboeck.at/en/downloads).

TINES										SPECIFICATION / RETRO-FIT OPTIONS									
Tines 7/490 mm	-	-	-	-	-	-	-	-	-	Warning signs + LED lights to the front and/or rear	-	-	-	-	-	-	-	-	-
Tines 8/490 mm	-	-	-	-	-	-	-	-	-	Seeder P-BOX-STI (electric drive)	-	-	-	-	-	-	-	-	-
Tines 8/490 mm STRAIGHT	-	-	-	-	-	-	-	-	-	Seeder P-BOX-MD (mechanical drive)	-	-	-	-	-	-	-	-	-
Tines 10/490 mm	-	-	-	-	-	-	-	-	-	Electric fan	-	-	-	-	-	-	-	-	-
Tines 10/490 mm STRAIGHT	-	-	-	-	-	-	-	-	-	Mechanical fan	-	-	-	-	-	-	-	-	-
Tines 6,5/490 mm	-	-	-	-	-	-	-	-	-	Hydraulic fan	-	-	-	-	-	-	-	-	-
Tines 6,5/380 mm	-	-	-	-	-	-	-	-	-	Speed sensor and sensor indicating the position of the 3 point hitch (STI)	-	-	-	-	-	-	-	-	-
Number of tines	60	✓	●	●	-	-	-	-	-	Retaining plate and mech. jogging unit	-	-	-	-	-	-	-	-	-
Mechanical adjustment of aggressivity	-	-	-	-	-	-	-	-	-	Hectar counter	-	-	-	-	-	-	-	-	-
Hydraulic adjustment of aggressivity	-	-	-	-	-	-	-	-	-	Airflow monitoring	-	-	-	-	-	-	-	-	-
Protection against tire loss	-	-	-	-	-	-	-	-	-	Cable to receive speed info and info about position of the 3 point hitch from the 7-pair plug off the tractor	-	-	-	-	-	-	-	-	-
Line spacing (cm)	-	-	-	-	-	-	-	-	-	GPS- or radar sensor for speed info (STI)	-	-	-	-	-	-	-	-	-
Number & size of sections (cm)	-	-	-	-	-	-	-	-	-	Universal holder for terminal (STI)	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	Area-specific, automatic regulation of the seeding rate in combination with the ISARA-Sensor	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	Alarm when box gets empty	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	Calibration button (STI)	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	Version with 500 l tank volume	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	Deflector plate made from stainless steel connections	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	Hydr. valve to combine 2 hydr. connections	-	-	-	-	-	-	-	-	-
	-	-	-	-	-	-	-	-	-	Front mounting frame	-	-	-	-	-	-	-	-	-

Technical changes and mistakes are subject to change without prior notice!

In order to introduce the benefits of our continuous product development, we reserve the right to make technical changes without prior notice. Printing and typesetting errors or changes of any kind do not entitle the customer to any claims. Individual equipment specifications, which are illustrated or described here, are only available as options.

In case of contradictions between individual documents regarding the scope of supply, the information in our current price list shall apply.

All pictures are symbol pictures and may contain options which are available for an additional charge. For further information please contact our sales team.

GRASSLAND TECHNOLOGY	DIMENSIONS AND TECHNICAL DATA									FOLDING		WHEELS		FRAME DESIGN					
	Model = Working width (cm)	Transport width (cm)	Parking height (cm)	Basic weight (approx. in kg)	Standard track width (approx. in cm), infinitely variable	Track width infinitely variable up to 2 m	Mounting category	Power requirement from HP/kW	Rigid	Hydraulically folding	Hydraulic double folding	Semi-mounted / trailed	Hydraulic transport lock	Wheel chocks	Groundwheels (standard equipment)	Heavy frame	Parallel guided weeder sections with hydr. level regulation	Heavy duty front levelling plates	Light front levelling plates
SPORTSTAR	150	150	190	200	136-140	●	I/28	20/15	✓	-	-	-	-	-	2	-	-	-	●
	200	200	190	230	136-140	●	I/28	25/18	✓	-	-	-	-	-	2	-	-	-	●
	300	300	190	320	136-140	●	I/28	30/22	✓	-	-	-	-	-	2	-	-	-	●
	450	260	250	560	136-140	●	I/28	40/19	-	✓	-	-	-	-	4	-	-	-	●
	500	260	250	630	136-140	●	I/28	50/27	-	✓	-	-	-	-	4	-	-	-	●
	600	300	250	740	136-140	●	II/28	60/44	-	✓	-	-	-	-	4	●	-	-	●

✓ = standard equipment

● = optionally available

- = not possible

Conversion cm in inch = cm / 2,54

Conversion cm in feet = cm / 30,48

Technical changes and mistakes are subject to change without prior notice!

Technical changes and mistakes are subject to change without prior notice.

In case of contradictions between individual documents regarding the scope of supply, the information in our current price list shall apply.

All pictures are symbol pictures and may contain options which are available for an additional charge. For further information please contact our sales team.

All pictures are symbol pictures and may contain options which are available for an additional charge. For further information please contact our sales team.
Photos & Graphics: © Finhåk GmbH: Photos & Graphics free without licence, but can be used only unchanged | Text & Content: © Finhåk GmbH: can be used unchanged if source is cited | Version: 10/2021